


Managing Q850 to SIP Override Tables


SIP and ISDN use different response messages to communicate why a call failed or could not be connected (Q.850 for ISDN and SIP Responses for SIP). By default, the UX system uses [RFC 3398](#) map these to each other. Override Tables allow one to override one or more of these mappings to a different message, which is useful for interoperating with nonstandard equipment. To use a table created here, select it from the Q850 to SIP Override Tables field in a [SIP Signaling Groups](#) entry.

Working with Q850 to SIP Override Tables


1. In the WebUI, click the **Settings** tab.
2. In the left navigation pane, go to **Telephony Mapping Tables > Q850 to SIP Override Tables**.




To view a table's properties:


1. Click the popup () icon next to the entry you want to view.
2. When you are finished, close the window.

To modify a Q850 to SIP Override Table:



1. Click the **expand** () icon next to the entry you wish to modify.
2. Modify the table's **Description** as desired
3. Click **OK**.

To add a Q850 to SIP Override Table:

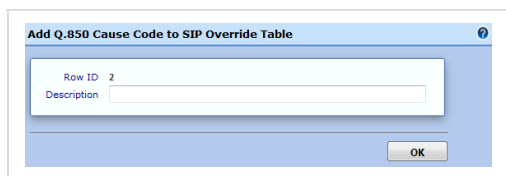1. Click the **Add** () icon.



2. Enter a descriptive name in the **Description** text field.
3. Click **OK**.

 **Helpful Tip:** To delete an entry, simply select the checkbox next to the entry you wish delete, then click the Delete () icon located at the top of the window.

Adding and Modifying Entries to Q850 to SIP Override Tables