

Rebooting the Sonus SBC Edge

⚠️ ASM Behavior on Sonus SBC 1000/2000 Reboot Operation

Depending on your SBC Edge (SBC) model, users with a built-in [Working with the ASM: SBA, CCE and 3rd Party Applications](#) may be impacted by this operation:


- **Sonus SBC 2000**
 - If the ASM is running, rebooting the SBC **will cause the ASM to also reboot.**
 - If the [ASM is shut down](#), rebooting the SBC **will not restart the ASM.**
 - *To bring the ASM back into operation, you must physically power off and power back on the SBC.*
- **Sonus SBC 1000** --- rebooting the SBC will reset the Ethernet port which could create an unreachable state for the ASM — this state lasts only a few seconds.

Rebooting the Sonus SBC Edge

To reboot the Sonus SBC Edge system:


1. In the WebUI, click the **Tasks** tab.
2. In the left navigation pane, under the **System**, click **Reboot Sonus SBC**.

Figure 1: Reboot

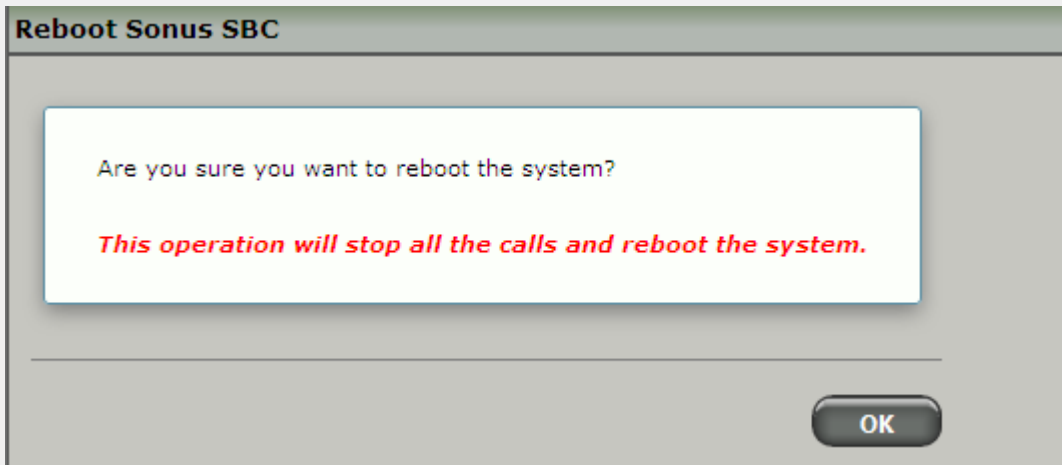

3. Click **OK**. The following popup will be displayed to confirm the action:

Figure 2: Confirm

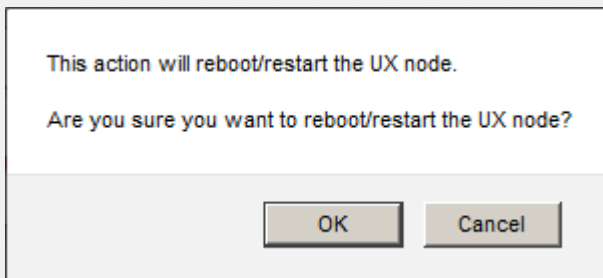

4. Click **OK** to reboot the Sonus SBC Edge
5. The web interface will dispatch the following status message throughout the reboot cycle.

Figure 3: Status Message



- ✔ On average, the **Sonus SBC 1000/2000 system takes between 3 to 4 minutes to fully reboot** and become reachable again through the web interface.

Upon completion, you will be automatically redirected to the [Login Screen](#)

